



Our chains are manufactured to meet strict quality standards.

High toughness and resistance to traction to avoid the effects of impact loads.

Link marking to ensure chain identification and traceability.

Security in every link.


Quality is a top priority, assured by our ongoing, thorough controls:

- Tensile and bend deflection test.
- Visual inspection and dimensional controls at all stages of manufacture.

Surface finished.



VIC 8 Grade 80 Alloy Chain									
Diameter		Pitch		Internal Width		WLL		Weight	
mm	inch	mm	inch	mm	inch	t	lb	kg/m	lb/ft
7	9/32	21	0.83	9.1	0.36	1.5	3,500	1.1	0.74
8	5/16	24	1.94	10.4	0.41	2	4,500	1.4	0.94
10	3/8	30	1.18	13	0.51	3.15	7,100	2.2	1.48
13	1/2	39	1.54	16.9	0.67	5.3	12,000	3.8	2.55
16	5/8	48	1.89	20.8	0.82	8	18,100	5.7	3.83
19	3/4	57	2.24	24.7	0.97	11.2	28,300	8	5.38
22	7/8	66	2.60	28.6	1.13	15	34,200	10.9	7.32
26	1	78	3.07	33.8	1.33	21.2	47,700	15.2	10.21
32	1-1/4	96	3.78	41.6	1.64	31.5	72,300	23	15.46

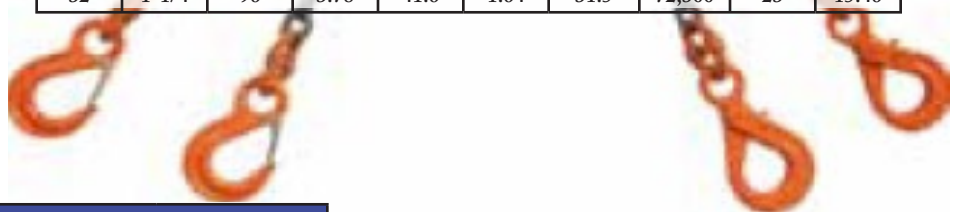

Grade 80 Chains for the Fishing Industry									
Short Link									
Diameter		Pitch		Internal Width		WLL		Weight	
mm	inch	mm	inch	mm	inch	t	lb	kg/m	lb/ft
7	9/32	21	0.83	10	0.39	1.5	3,500	1.1	0.74
8	5/16	24	1.94	12	0.47	2	4,500	1.4	0.94
10	3/8	30	1.18	15	0.59	3.2	7,100	2.2	1.48
13	1/2	39	1.54	19	0.75	5.4	12,000	3.8	2.55
16	5/8	48	1.89	24	0.94	8	18,100	5.7	3.83
19	3/4	57	2.24	28	1.10	11.2	28,300	8	5.38
Mid Link									
Diameter		Pitch		Internal Width		WLL		Weight	
mm	inch	mm	inch	mm	inch	t	lb	kg/m	lb/ft
10	3/8	40	1.57	15	0.59	3.2	7,100	2	0.74
13	1/2	52	2.05	19	0.75	5.4	12,000	3.35	2.25
16	5/8	64	2.52	25	0.98	8	18,100	5.3	3.56
19	3/4	76	2.99	29	1.14	11.5	28,300	7.5	5.04
Long Link									
Diameter		Pitch		Internal Width		WLL		Weight	
mm	inch	mm	inch	mm	inch	t	lb	kg/m	lb/ft
9	5/16	53	2.09	15	0.59	2.5	3,500	1.4	0.94
11	7/16	63	2.48	18	0.71	3.8	4,500	2.2	1.48
13	1/2	80	3.15	20	0.79	5.4	7,100	3.08	2.07
16	5/8	100	3.94	28	1.10	8.2	12,000	4.38	2.94
19	3/4	95	3.74	28	1.10	11.5	18,100	6.4	4.30
Grade 95 Fishing Chains Available on Request									

Chains manufactured with special high resistance steels, heat treated to respond to the hard working conditions of the fishing industry.

Lightweight, with a high resistance to wear.

Our wide range includes three types of chain, differentiated by link length.

Painted finish; however, different finishes are available upon request: self colour, galvanized, etc.



www.cemvisausa.com

Tel: 800-444-6510 • Fax: 401-789-7378